
Wet-Field® Eraser®

Precise, Targeted Coagulation

Beaver-Visitec International offers a range of specialty Eraser® Instruments for Vitreoretinal procedures, Glaucoma filtration and Cataract incisions. Designed for targeted and discrete coagulation with minimal tissue trauma and minimal peripheral cellular necrosis.




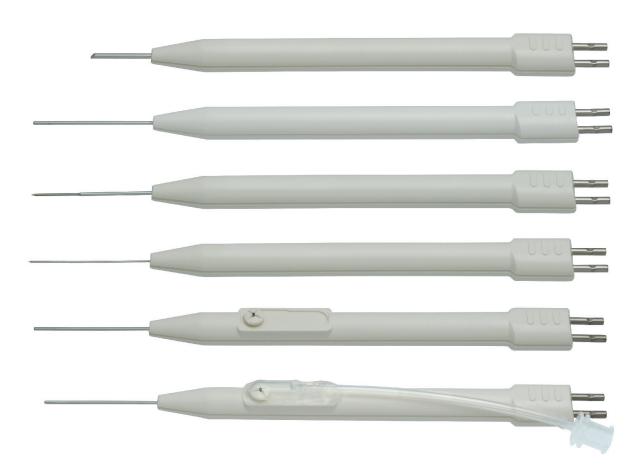

Wet-Field® Eraser®

Precise, Targeted Coagulation

Wet-Field® Hemostatic Eraser® Bipolar 18 GA Description | Item # | 18 GA, bevel tip, straight, 10/Bx | 221250 | 18 GA, blunt tip, angled 45 degrees, 10/Bx | 221251

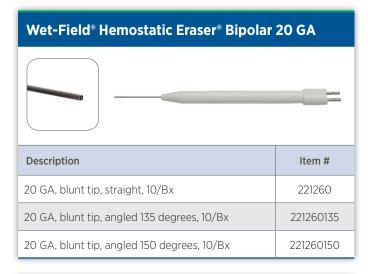

Wet-Field® Hemostatic Eraser® Bipolar 23 GA






Description	Item #
23 GA, fine tip, straight. 5/Bx	221268
23 GA, fine tip, angled 135 degrees, 5/Bx	221268135
23 GA, fine tip, angled 150 degrees, 5/Bx	221268150
23 GA, blunt tip, angled 90 degrees, 5/Bx	22126990
23 GA, blunt tip, angled 135 degrees, 5/Bx	221269135
23 GA, blunt tip, angled 150 degrees, 5/Bx	221269150

Straight Eraser® styles are available in 18 GA, 20 GA, 23 GA and 25 GA designs. Additional specialty products include hollow-core, passive/active aspiration devices with reflux and extrusion cannula modalities - combined with bipolar diathermy capability. Curved instruments facilitate traditional and extrusion assisted aspiration.



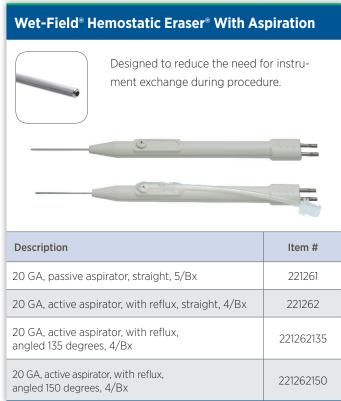

Contoured shafts are designed to conform to ocular anatomy while maximizing tip visualization, range of motion, and target approach versatility.



Wet-Field® Eraser®

Hemostatic Coagulators

The Wet-Field® Coagulator is designed to provide precise episcleral, intrascleral, and intraocular hemostasis with reduced peripheral tissue trauma. Controlled Rf diathermy delivers targeted coagulation with the most comprehensive line of bipolar Eraser® instruments, forceps and cables.

Wet-Field® Coagulators



Description	Item #	Qnty
Wet-Field Diathermy Coagulator (universal power supply for 100-240 volts) with foot- switch - electrically powered	221340	1/Ea
Footswitch	232345	1/Ea

Wet-Field® Bipolar Cables



Description	Item #	Qnty
Wet-Field Cables - Reusable	221202	3/Bx
Wet-Field Cables - Sterile single-use	221350 10	10/Bx
Wet-Field Cables - Sterile single-use	221350 50	50/Bx

Specifications

Weight: 4 lb. 2 oz. (1.9 kg) Dimensions: 5.5" x 8.5" x 11"

Power Requirements: 100 - 240 VAC, 65 VA, 50/60 Hz

Output Waveform: 455 kilohertz (kHz) square wave variable burst length

Frequency Range: 455 kilohertz

Output Current Range: 36-641 milliamperes (mA rms) into a 50 non-inductive load, continuously variable

Output Power: 0.5 -21 watts into a 50 ohms non-inductive load, continuously variable

Test Load: 50 ohms non-inductive load, neuro-surgical forceps input, using electrosurgical analyzer

Rated Accessory Voltage: 210V Peak



Beaver-Visitec International Ltd

85c Park Drive, Milton Park, Abingdon, Oxfordshire OX14 4RY

Tel.: +44 1865 601 256 Fax: +44 1865 595 761 www.beaver-visitec.com